



### PIN OUT

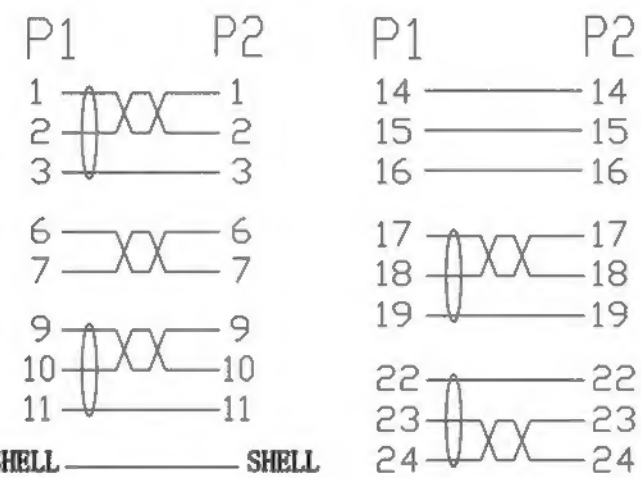

### REQUIREMENTS:

- 1:100% short and open testing.
- 2:Test conditions
  - DC300V /10MS
  - Insulation resistance 10MΩ(Min)
  - Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.028	KG
⑤	INTER MOLDED	LDPE	0.028	KG
④	FERRITE CORE	F5B:RH8.0*12*20	2	PCS
③	SCREW	B-L30.5,BLACK PVC	4	PCS
②	CONNECTOR	DVI 18+1/M BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*4C+1P*30#+3C*30#+ADB OD:6.0±0.15 JACKET:BLACK PVC	5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		MARCH 4.2012	DVI 18+1/M TO DVI 18+1/H	MARCH 4.2012	FREE	
				26-1665		
				26-1665	Edition 1	Sheet 1/2